

**AN ADVANCED DIGITAL SATELLITE RECEIVER FOR
ANALOG SERVICE CONVERSION AND BASIC CABLE
OPERATIONS**

HIGHLIGHTS INCLUDE:

- MPEG-2 Main Level@Main Profile
- DigiCipher[®] II MegaPipe+ Support
- Variable tuning from 4 MHz to 36 MHz
- Dolby[®] Digital and MPEG layer II audio processing
- VBI reinsertion SID/AMOL-II, NABTS and closed caption
- Stackable 1RU chassis design
- DigiCipher II conditional access control
- Quick disconnect screw terminals for easy installation
- Bypass video and audio inputs
- DTMF cue tones for local ad insertion
- ASI input and/or output for easy connection to digital cable headend products
- 10/100 BaseT Ethernet port for datacasting and/or SNMP monitoring and control
- Dedicated video diagnostics output

For more information regarding any of these features contact your Motorola sales representative.

DSR-4410

Commercial Satellite Receiver



The new DSR-4410 IRD from Motorola brings the latest technology advances from the recognized leader in satellite program delivery. Building on the DigiCipher[®] II platform, the DSR-4410 IRD is affordable and easy to use. Its sleek packaging design fits in a standard 19" relay rack and requires only a single rack unit of space. The DSR-4410 is designed to deliver outstanding video and audio performance. This receiver can output either NTSC or PAL video formats, automatically matching the programmer's video format.

With a variable front-end and bypass capabilities, the DSR-4410 is ideally suited for network conversion from analog to digital. Full VBI reinsertion on lines 10 - 22 for SID/AMOL I & II and NABTS is standard on the DSR-4410. Equipped with DVB-ASI input and output, the DSR-4410 is ready to connect to the rest of your head-end equipment.

TECHNICAL SPECIFICATIONS

L-Band Input

Input Frequency:	950 - 2150 MHz
Input Impedance:	75
Input Connectors:	Two (2) F-type
LNB Power Out F-Connector:	16V DC min/450 mA
Port-to-Port Isolation:	40 db (minimum)

DigiCipher II Processing

Modulation Modes:	OQPSK and QPSK
Symbol Rates:	3.25, 4.88, 7.32, 9.76, 11.71, 14.63, 19.51, 29.27 Msps
FEC Rates:	5/11 (19.51 & 29.27 Msps only), 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 7/8
Eb/No:	4.0 db @ 19.5 Msps (FEC=3/4)

Composite Video

Frequency Response (NTSC):	±0.75 dB, 1 kHz - 4.2 MHz
Frequency Response (PAL):	±0.75 dB, 1 kHz - 5.5 MHz
Signal/Noise Ratio:	57 dB (min)
Differential Gain:	4% (max)
Difference Phase:	4 deg. (max)
Output Impedance:	75
Output Level:	1.0 V p-p

Audio

Output:	2 stereo pair or 4 mono
Output Level:	±18.0 dBm, ±1.0 dB into 600 balanced load adjustable (0 to -15 dB)
Frequency Response:	±1.0 dB, 20 Hz to 20 kHz
Total Harmonic Distortion:	0.25% or better at 1 kHz
Signal/Noise Ratio:	86.2 dB or better at 1 kHz
Isolation, L/R:	80 dB at 1 kHz
Impedance:	50
Connector:	Quick disconnect screw terminal

Ethernet

Connector:	RJ-45
Format:	10/100BaseT

ASI Output/Input

Format:	Asynchronous serial interface
Transmission:	Data byte and packet
Standard:	CENELEC EN 50083-9
Connector:	BNC

Cue Tones

Signal Type:	Differential output
Signal Level:	0 dBm, ±3 dB (600)/tone
Connector:	Quick disconnect screw terminal

Contact Closures


Number of Closures:	2
Type:	Form C

Physical

Operating Temperature:	0° to 40°C
Humidity:	95%, relative maximum
Dimensions:	48 cm/18.90" (W) x 46 cm/18.11" (D) x 4.2 cm/1.65" (H)
Weight:	5.0 kg/11 lbs (approx.)
Power Input:	90-250 VAC, 47-63 H, 25 W

Other

Limited Warranty:	One year
UL/TUV/CE:	Listed/approved

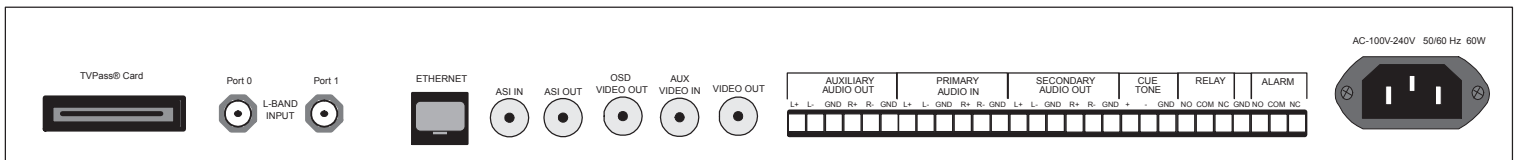

Motorola, Inc. Connected Home Solutions
 6450 Sequence Drive, San Diego, California 92121 U.S.A.
www.motorola.com/broadband 858-404-1500

MOTOROLA and the Stylized M Logo are registered in the U.S. Patent and Trademark Office.
 All other product or service names are the property of their registered owners. Pro Logic and the double-D symbol are registered trademarks of Dolby Laboratories;
 Dolby Digital is manufactured under license from Dolby Laboratories.
 © Motorola, Inc. 2005

Features and functions subject to change without notice.
 5856-905-0K